


WPTPCO

wide-span branch cover

Dissymmetric covers on request.

Covers with higher width/ radius are delivered as two pieces including coupling bolts. In our additional information is explained which amount of fitting cover hook clips you need. The following radii are available on request: 600 mm, 900 mm.

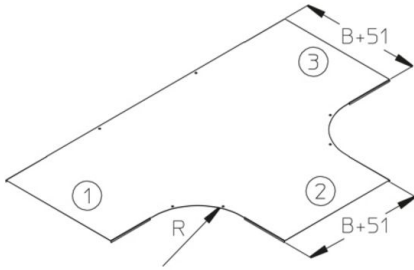

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Product	B	R	G
WPTPCO20-45-HDG	200 mm	450 mm	4,22 kg
WPTPCO30-45-HDG	300 mm	450 mm	7,88 kg
WPTPCO40-45-HDG	400 mm	450 mm	10,30 kg
WPTPCO45-45-HDG	450 mm	450 mm	14,47 kg
WPTPCO50-45-HDG	500 mm	450 mm	16,11 kg
WPTPCO60-45-HDG	600 mm	450 mm	19,55 kg
WPTPCO70-45-HDG	700 mm	450 mm	27,85 kg
WPTPCO75-45-HDG	750 mm	450 mm	30,14 kg
WPTPCO80-45-HDG	800 mm	450 mm	32,49 kg
WPTPCO90-45-HDG	900 mm	450 mm	37,37 kg
WPTPCO100-45-HDG	1000 mm	450 mm	42,51 kg

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	B	R	G
WPTPCO20-45-304	200 mm	450 mm	3,94 kg
WPTPCO30-45-304	300 mm	450 mm	7,36 kg
WPTPCO40-45-304	400 mm	450 mm	9,63 kg
WPTPCO45-45-304	450 mm	450 mm	14,47 kg
WPTPCO50-45-304	500 mm	450 mm	15,06 kg





Product	B	R	G
WPTPCO60-45-304	600 mm	450 mm	18,72 kg
WPTPCO70-45-304	700 mm	450 mm	27,85 kg
WPTPCO75-45-304	750 mm	450 mm	30,14 kg
WPTPCO80-45-304	800 mm	450 mm	32,49 kg
WPTPCO90-45-304	900 mm	450 mm	37,37 kg
WPTPCO100-45-304	1000 mm	450 mm	42,51 kg


Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	B	R	G
WPTPCO20-45-316	200 mm	450 mm	3,94 kg
WPTPCO30-45-316	300 mm	450 mm	7,36 kg
WPTPCO40-45-316	400 mm	450 mm	9,63 kg
WPTPCO45-45-316	450 mm	450 mm	14,47 kg
WPTPCO50-45-316	500 mm	450 mm	15,06 kg
WPTPCO60-45-316	600 mm	450 mm	18,72 kg
WPTPCO70-45-316	700 mm	450 mm	27,85 kg
WPTPCO75-45-316	750 mm	450 mm	30,14 kg
WPTPCO80-45-316	800 mm	450 mm	32,49 kg
WPTPCO90-45-316	900 mm	450 mm	37,37 kg
WPTPCO100-45-316	1000 mm	450 mm	42,51 kg

B: width
R: radius
G: weight

DETAILS / APPLICATIONS



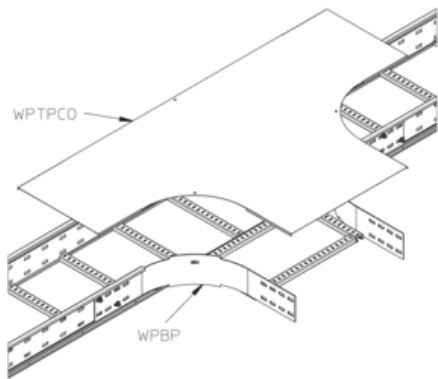

OPTIONAL ACCESSORIES

WPFCOH

