


KHA 2

montageprofiel 50x31 mm, geperforeerd

montageprofiel 50x31x3,25 mm, geperforeerd 13x26, sleufbreedte 22 mm

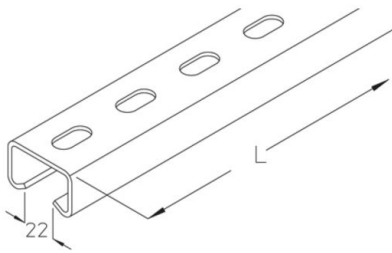

Thermisch verzinkt volgens BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
KHA 2-05F	31 mm	50 mm	500 mm	3,25 mm	1,5 kg
KHA 2-10F	31 mm	50 mm	1000 mm	3,25 mm	3 kg
KHA 2-15F	31 mm	50 mm	1500 mm	3,25 mm	4,5 kg
KHA 2-20F	31 mm	50 mm	2000 mm	3,25 mm	6 kg
KHA 2-30F	31 mm	50 mm	3000 mm	3,25 mm	9 kg
KHA 2-60F	31 mm	50 mm	6000 mm	3,25 mm	17,9 kg

H: hoogte

B: breedte



L: lengte

t: materiaaldikte

G: gewicht

DETAILS / TOEPASSINGEN



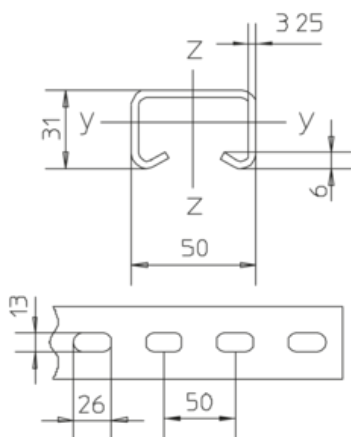

$$\begin{aligned}W_y &= 2.31 \text{ cm}^3 \\W_z &= 5.40 \text{ cm}^3 \\I_y &= 3.77 \text{ cm}^4 \\I_z &= 13.49 \text{ cm}^4\end{aligned}$$

OPTIONELE TOEBEHOREN

HS22, SKS H

