


KHA 8

montageprofiel 40x22 mm, geperforeerd Vluchtweginstallatie

montageprofiel 40x22x2,00 mm, geperforeerd 11x30, sleufmaat 18 mm

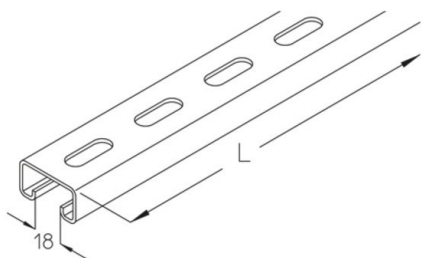


Thermisch verzinkt volgens BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
KHA 8-01F	22 mm	40 mm	100 mm	2,00 mm	0,14 kg
KHA 8-02F	22 mm	40 mm	200 mm	2,00 mm	0,30 kg
KHA 8-03F	22 mm	40 mm	300 mm	2,00 mm	0,46 kg
KHA 8-04F	22 mm	40 mm	400 mm	2,00 mm	0,60 kg
KHA 8-05F	22 mm	40 mm	500 mm	2,00 mm	0,76 kg
KHA 8-06F	22 mm	40 mm	600 mm	2,00 mm	0,90 kg
KHA 8-07F	22 mm	40 mm	700 mm	2,00 mm	1,06 kg

H: hoogte
B: breedte
L: lengte
t: materiaaldikte
G: gewicht

DETAILS / TOEPASSINGEN



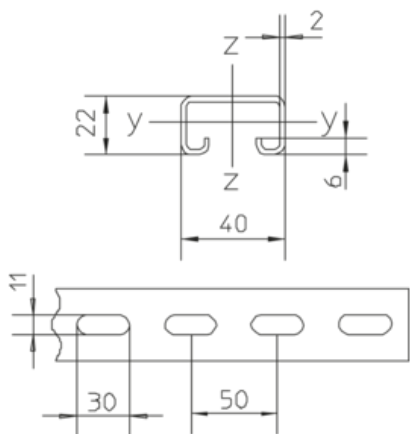

OPTIONELE TOEBEHOREN

HS18, AM18, AMF18, ASK 8

