

KHA 82

montageprofiel 41x82 mm, geperforeerd

montageprofiel 41x82x2,50 mm, geperforeerd 14x30, ruggelast, sleufmaat 22 mm

Thermisch verzinkt volgens BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
KHA 82-6000-HDG	82 mm	41 mm	6000 mm	2,50 mm	31,36 kg

Roestvrij staal, volgens ASTM 304 / BS 304 S 3

Product	H	B	L	t	G
KHA 82-6000-304	82 mm	41 mm	6000 mm	2,50 mm	29,74 kg


Roestvrij staal volgens ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Product	H	B	L	t	G
KHA 82-6000-316	82 mm	41 mm	6000 mm	2,50 mm	30,10 kg

H: hoogte
B: breedte
L: lengte
t: materiaaldikte
G: gewicht



DETAILS / TOEPASSINGEN

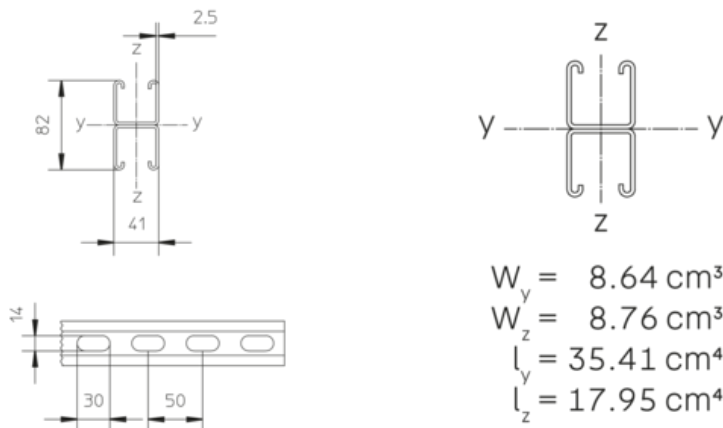

OPTIONELE TOEBEHOREN

AM22, BGF 82, AVB 82, AVBL 82, SAI 41, AVSK 82, AMF22, BGA 41/2, RUS 41

