


KHUV 80

verbinder, KHU 80

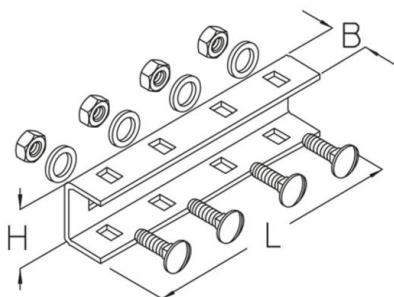

Thermisch verzinkt volgens BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
KHUV 80F	69 mm	54 mm	310 mm	4,00 mm	1,92 kg
inclusief: 6x SEM 12F 6x FRS 12X30F					
zeskantmoer DIN 934 slotbout, DIN 603					

Thermisch verzinkt volgens BS 729 (DIN EN ISO 1461)

Product	H	B	L	t	G
KHUV 80-HDG	69 mm	54 mm	310 mm	4,00 mm	1,92 kg
inclusief: 6x FRS 12X30-HDG 6x SEM 12-HDG					
slotbout, DIN 603 zeskantmoer DIN 934					

H: hoogte
B: breedte
L: lengte
t: materiaaldikte
G: gewicht

