


RIADS

installatiegoot T-stukdeksel, zwaar

kabelgoot T-stukdeksel, sluitend passend, met draaisluiting

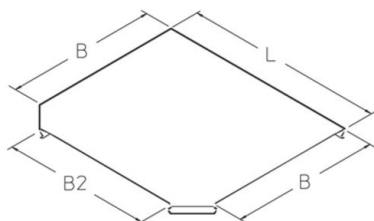

Continu thermisch verzinkt (Sendzimir-techniek) (DIN EN 10346)

Product	B	B2	L	t	G
RIADS 10S	100 mm	100 mm	214 mm	1,50 mm	0,20 kg
RIADS 20S	200 mm	200 mm	314 mm	1,50 mm	0,40 kg
RIADS 30S	300 mm	300 mm	414 mm	1,50 mm	1,10 kg
RIADS 10-05S	100 mm	50 mm	164 mm	1,50 mm	0,18 kg
RIADS 20-10S	200 mm	100 mm	214 mm	1,50 mm	0,40 kg
RIADS 30-20S	300 mm	200 mm	314 mm	1,50 mm	1,10 kg

B: breedte

B2: breedte

L: lengte

t: materiaaldikte

G: gewicht

