


UKTR

scheidingsshot

Senzimir verzinkt scheidingsshot t.b.v. vloergoot.

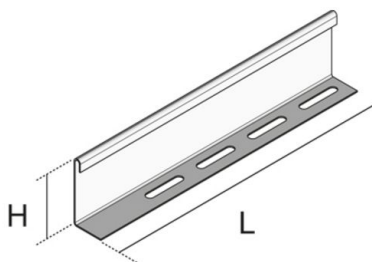

Continu thermisch verzinkt (Senzimir-techniek) (DIN EN 10346)

Product	H	L	G
UKTR 35S	33 mm	3000 mm	1,6 kg
UKTR 60S	57 mm	3000 mm	2,1 kg
UKTR 85S	80 mm	3000 mm	2,8 kg
UKTR 110S	107 mm	3000 mm	4,8 kg

H: hoogte
L: lengte
G: gewicht

OPTIONELE TOEBEHOREN

SNA

