


UM

bevestigingsmof

Befestigingsmof, Sendzimir, voor vloergoot. Inzetbaar bij dilatatievoegen in de onafgewerkte betonvloer en de afdichting van stootranden.

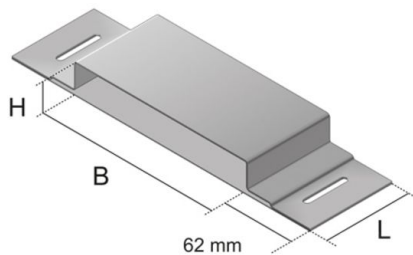

Continu thermisch verzinkt (Sendzimir-techniek) (DIN EN 10346)

Product	H	B	L	G
UM 28-190S	28 mm	194 mm	82 mm	0,55 kg
UM 28-250S	28 mm	254 mm	82 mm	0,64 kg
UM 28-350S	28 mm	354 mm	82 mm	0,8 kg
UM 38-190S	38 mm	194 mm	82 mm	0,56 kg
UM 38-250S	38 mm	254 mm	82 mm	0,66 kg
UM 38-350S	38 mm	354 mm	82 mm	0,82 kg
UM 48-190S	48 mm	194 mm	82 mm	0,58 kg
UM 48-250S	48 mm	254 mm	82 mm	0,68 kg
UM 48-350S	48 mm	354 mm	82 mm	0,84 kg

H: hoogte
B: breedte
L: lengte
G: gewicht

OPTIONELE TOEBEHOREN

UN

