


VB

bodemverbinder

Dit artikel is in roestvast staal met het materiaalnr. 1.4571/1.4404 (V4A) verkrijgbaar.

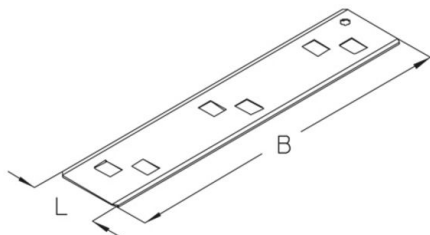

Continu thermisch verzinkt (Sendzimir-techniek) (DIN EN 10346)

Product	B	L	G
VB 10S	54 mm	70 mm	0,04 kg
VB 20S	155 mm	70 mm	0,11 kg
VB 30S	255 mm	70 mm	0,18 kg
VB 40S	355 mm	70 mm	0,27 kg
VB 50S	455 mm	70 mm	0,32 kg
VB 60S	555 mm	70 mm	0,38 kg

Thermisch verzinkt volgens BS 729 (DIN EN ISO 1461)

Product	B	L	G
VB 10F	54 mm	70 mm	0,04 kg
VB 20F	155 mm	70 mm	0,11 kg
VB 30F	255 mm	70 mm	0,19 kg
VB 40F	355 mm	70 mm	0,28 kg
VB 50F	455 mm	70 mm	0,34 kg
VB 60F	555 mm	70 mm	0,4 kg

Roestvrij staal, volgens ASTM 304 / BS 304 S 3





Product	B	L	G
VB 10E	54 mm	70 mm	0,04 kg
VB 20E	155 mm	70 mm	0,11 kg
VB 30E	255 mm	70 mm	0,18 kg
VB 40E	355 mm	70 mm	0,27 kg
VB 50E	455 mm	70 mm	0,32 kg
VB 60E	555 mm	70 mm	0,38 kg

B: breedte
L: lengte
G: gewicht

