

BODO T

single outlet with one floor socket, dry maintained, round

Round single-outlet made of plastic, equipped with an isolated ground receptacle and an empty space for data technology. With floor cover protection frame including a pivotable cover with cable outlet, mounting box with strain relief and a set of claws. For the installation into screed and raised floor/hollow floor openings. Equipped with a isolated ground receptacle of 45x45mm and a RJ45 dummy data cover 22.5x45 mm. Suitable for rooms with dry-cleaned floor covers. Designed for office traffic loads.

Please mind the technical information in chapter planning.



material	Cover with cable outlet and frame, mounting box: polyamide
type of assembly	Fixing on floor box UBDHB / rough concrete floor and installation in screed or false floor
application area	dry floor cleaning
protection class	in use IP 20 / not in use IP 30
norm	according to DIN EN 50085
permits	according to VDE / TÜV
loading	including inspection stamp Ø 13 mm: 1.5 kN

Acrylonitrile-butadiene-styrene copolymer

Product	H	H _{min}	B	E	P _{max}	color	IP _n	IP _g	G
BODO T-G	126 mm	102 mm	133 mm	122 mm	1,5 kN	RAL 7011 (iron grey)	IP 30	IP 20	0,40 kg
incl.:									
1x UAA-B 22				cover, black					
1x UST45-W 1				shockproof socket, single					
1x UARM-3-1 118				cover plate for 3x UDAE22					
1x UG-R				mounting box, round					
BODO T-S	126 mm	102 mm	133 mm	122 mm	1,5 kN	RAL 9011 (graphite black)	IP 30	IP 20	0,40 kg



Product	H	H _{min}	B	E	P _{max}	color	IP _n	IP _g	G
incl.:									
1x UAA-B 22						cover, black			
1x UST45-W 1						shockproof socket, single			
1x UARM-3-1 118						cover plate for 3x UDAE22			
1x UG-R						mounting box, round			

H: height

H_{min}: Minimum installation height

B: width

E: fitting dimension

P_{max}: Maximum load


color:

IP_n: IP protection level in unused condition

IP_g: IP protection level in used condition

G: weight

DETAILS / APPLICATIONS

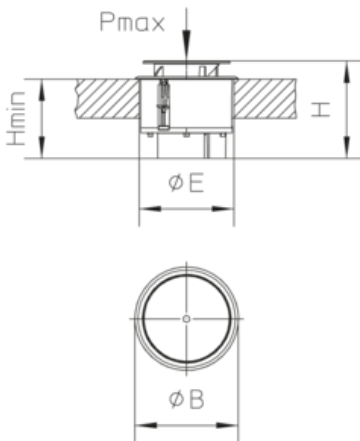

OPTIONAL ACCESSORIES

USK R122, UDKS R 1, UBDHB 122R, UWZ IS



dry-cleaned





Electrical and electronic equipment must not be disposed off via the household waste.

