


## UKDA 185V

cable duct assembly cover, double, angular

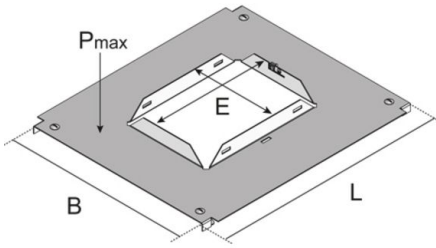

Assembly covers made of Sendzimir hot-dip galvanized sheet steel for latching to the side profile of the bottom part of the cable duct including turning bolt. Usable as pull- and installation box, with one opening for insertion of a shuttering unit that will be replaced with a rectangular assembly unit during final assembly.

material	sheet steel, hot-dip galvanized
type of assembly	catch mechanism on cable duct bottom part UKR
application area	screed-covered duct system
norm	according to DIN EN 50085
permits	according to VDE / TÜV

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	B	L	E	$P_{max}$	mounting box	G
UKDA-185V 30S	300 mm	420 mm	187 x 262 mm	0,75 kN	2	1,39 kg
incl.:						
1x UBDHB-Z			grounding clamp			
UKDA-185V 40S	400 mm	495 mm	187 x 262 mm	0,75 kN	2	2,26 kg
incl.:						
1x UBDHB-Z			grounding clamp			

**B:** width

**L:** length

**E:** fitting dimension

**$P_{max}$ :** Maximum load

**mounting box:** Maximum number of installable device casings.

**G:** weight





## OPTIONAL ACCESSORIES

USK, UBDEL

